


CAPITONÉ 250 x 250 x 15/25 units: mm



Thickness ≈ 15-25 mm Piece Dimensions

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

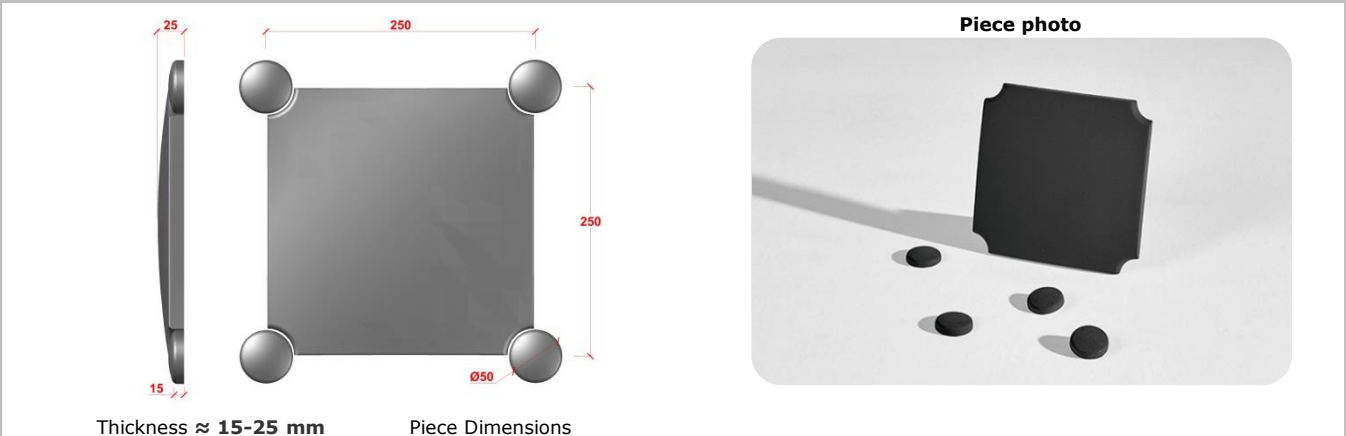

CAPITONÉ CP28

Product characteristics and package					Technical Specifications		
Colors Available	CP 27	CP 28	CP 29	CP 30	Product Classification	EN 14618	Concrete Coating
Product Type	Flat Elements				Surface Quality	EN 14617-16	Visual Inspection
Quantity per Pallet	27 m ²				Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm
Quantity per Box	0,75 m ²				Maximum Water Absorption	EN 14617-1	≤ 8 %
Items/m²	16 Units				Average Apparent Density	EN 14617-1	2200±50 kg/m ³
Items/Box	12 Units				Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change
Boxes/Pallet	36 Boxes				Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change
Average weight/m²	±42 kg				Minimum Flexural Strength	EN 14617-2	7 MPa
Average weight/Box	±31,3 kg				Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	C30/37 ≥ 37 N/mm ²
Average weight/Pallet	±1164 kg With Pallet				Water Absorption by Capillary	EN 772-11	≤ 1 g/(m ² .s)
Approved: Vitor Silva	Elaborate: Bruno Veloso				PTDS n° CAP_001_EN	Date: 04 08 2016	